



Out-Swing Screen Push Button Latch

DRILLING AND INSTALLATION INSTRUCTIONS

DRILLING INSTRUCTIONS

CAUTION: Locate installation so that latch will not hit the entrance lock

STEP NO. 1:

At desired height fold template along dotted lines, and tape to door.

STEP NO. 2:


Mark centers of the three holes on both sides.

STEP NO. 3:

Using a 5/16" drill, bore the three holes 1/2" deep on both sides.

NOTE: Ream out center hole by inserting drill and rotating with a slight wobbling action to clear hole and allow complete freedom of action for spindle.


SPINDLE MUST BE FREE. Door is now ready for latch installation - see instructions below.

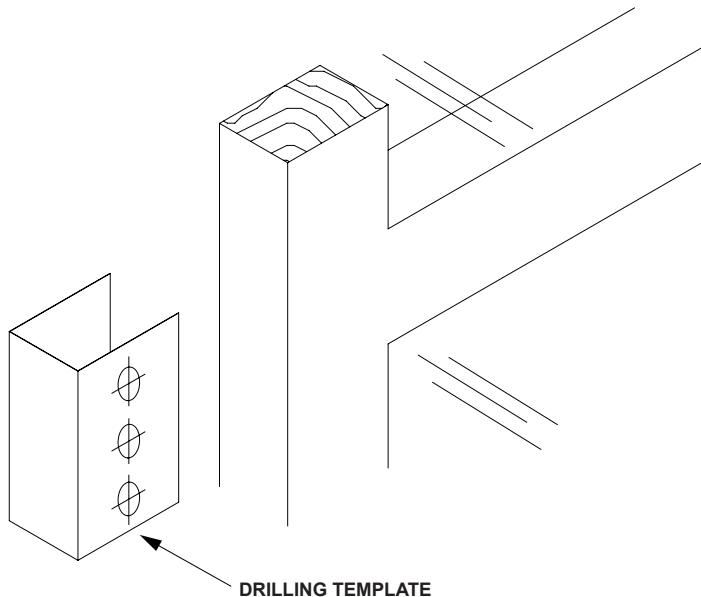

INSTALLATION INSTRUCTIONS

STEP NO. 4:

Assemble outside handle with button and spring. Push this assembly through installation holes from outside of door as shown.

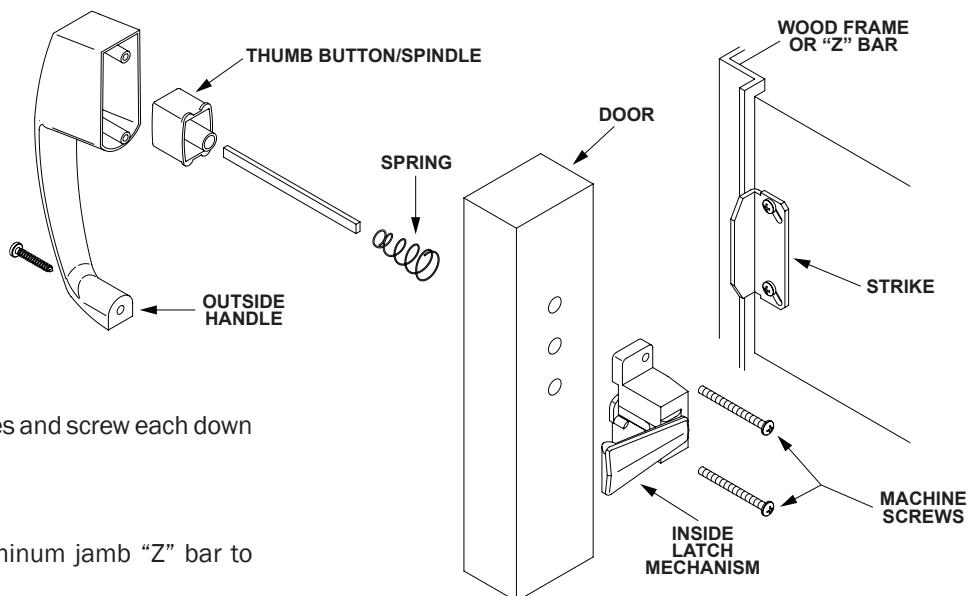

STEP NO. 5:

Depress button to extend spindle. Position latch mechanism over holes on inside of door, guiding spindle into rectangular slot in center of mechanism. Insert both machine screws into threaded sleeves and screw each down to a snug position.

STEP NO. 6:

Install strike plate on wood or aluminum jamb "Z" bar to firmly engage latch bolt.



Out-Swing Screen Push Button Latch

DRILLING AND INSTALLATION INSTRUCTIONS

DRILLING TEMPLATE

NOTE: If shipped template was discarded, cut out replacement template below on dashed lines.

